

How to replace the iPad battery

It is not easy to replace the iPad battery. But that doesn't mean you need to buy a new iPad just because the battery is dead. Here's how to replace the iPad battery.

The battery is the most important part of the iPad. After all, if an iPad doesn't have power, its other features won't work either. iPad batteries usually last a few years, after which, they will start to get worse and need to be recharged more often.

It is not easy to replace the iPad battery. But that doesn't mean you need to buy a new iPad just because the battery is dead. Here's how to replace the iPad battery.

Replace the battery for iPad longer warranty

If your iPad is still under warranty or you purchased an AppleCare extended warranty, Apple will be responsible for free battery replacement for you.



If your iPad is still under warranty, Apple will be responsible for free battery replacement for you
If your warranty is still there, visit the Apple support website at:

<https://support.apple.com/ipad/repair/service#battery>

Click the **Start a service request** button (near the bottom) and fill out the form. You can also book an appointment at the Apple Store and bring your iPad.

Remember to back up before handing over the iPad to avoid data loss. It will take about 3 to 5 days to replace or repair your iPad.

Replace the battery for iPad has expired warranty

If your iPad is no longer under warranty, Apple will replace the battery for \$ 99 / 2,300,000 VND (excluding shipping costs and taxes). You can take the device to a number of Apple service centers in Vietnam for more detailed advice.

Replace iPad battery yourself

You can replace the iPad battery yourself with the right tools and skills. But remember to only try this option if you are tech-savvy and willing to risk your iPad. It will cost from \$ 50 to \$ 90 (1,150,000 - 2,070,000 VND) to buy the tools and parts needed to replace iPad batteries. But remember, self-repair of an iPad will void the warranty (if the product remains) and if you damage the iPad, Apple will refuse to repair the device.

If you're still determined to replace your iPad battery yourself, here are detailed instructions that may help.

Step 1:

1. Wear safety glasses to protect your eyes and be careful not to damage the LCD screen.
2. If your screen glass has cracked, use tape on the screen to prevent it from further cracking during operation.

Step 2:

There are 14 metal pegs that fix the screen as shown in the illustration. Try to open them carefully, avoiding breaking.



There are 14 metal pegs that fix the screen

Step 3:


Use a metal spudger (a specialized tool to open Apple products) between the top edge of the screen and the rear panel assembly.

Move the spudger along the edges of the screen to separate it. Be careful and gentle to avoid damaging the device.

Step 4:

Lift the monitor and disconnect the 3 cables that attach it to the back board, including:

1. Digitizer (digitizer)
2. Light Sensor
3. Display Data Cable (allows data to be displayed on the screen)

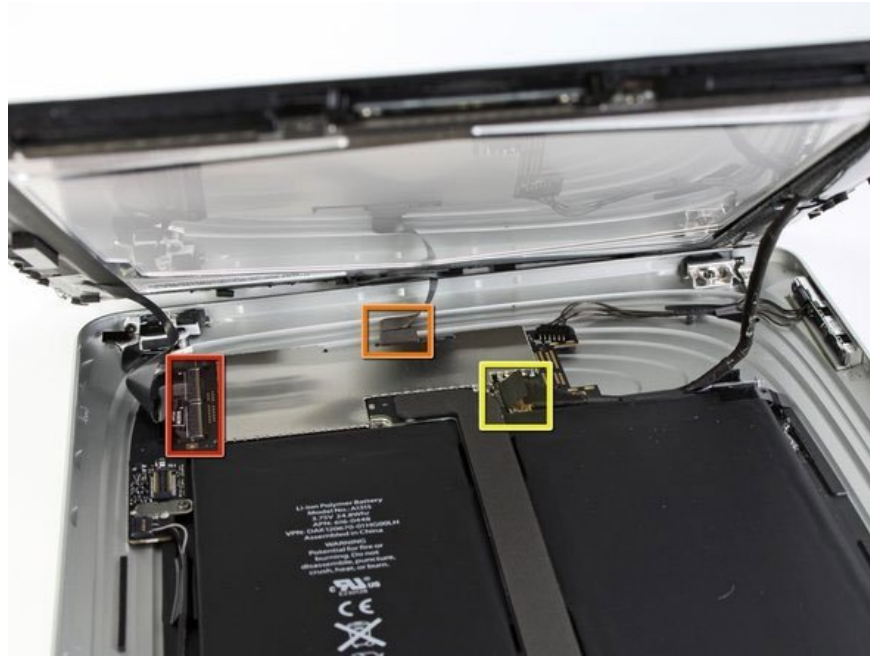

Disconnect 3 cables

Step 5:

Remove the screws that attach the board to the rear panel assembly.



Remove the screws that attach the board to the rear panel assembly

Step 6:

1. Use the edge of the plastic open tool to carefully remove the dock cable connector from the board.
2. Lift the board out of the rear panel assembly.

Step 7:



Carefully remove the plastic cover that covers the WiFi / Bluetooth board and the docking cable

Step 9:

Carefully lift the WiFi and Bluetooth antenna from the corresponding socket on the WiFi / Bluetooth board.

Step 10:

Lift the connector cable from the rear panel assembly.

Step 11:

Pull the speaker cable from the left side of the battery box and the WiFi antenna in the speaker assembly.

Step 12:

Lift the speaker assembly and push it forward, to remove the speaker from the rear panel assembly.

Step 13:

The battery is attached to the rear panel by an adhesive. Use the flat end of a spudger to gently lift the battery from the bottom case. When there is enough space, you can manually separate the battery from the adhesive. Please proceed with patience and caution.

