

How to Add or Change the Default Gateway in Linux

Your default gateway is the IP address of your router. Typically this is automatically detected by your operating system during installation, but you may need to change it. This is especially true if you have multiple network adapters or...

Part 1 of 2:

Using the Terminal




Open the Terminal. You can open the Terminal from the side bar, or by pressing `Ctrl`+`Alt`+`T`.

4.



Save your changes and exit. Press `Ctrl + X` and then `Y` to save your changes and exit.

5.

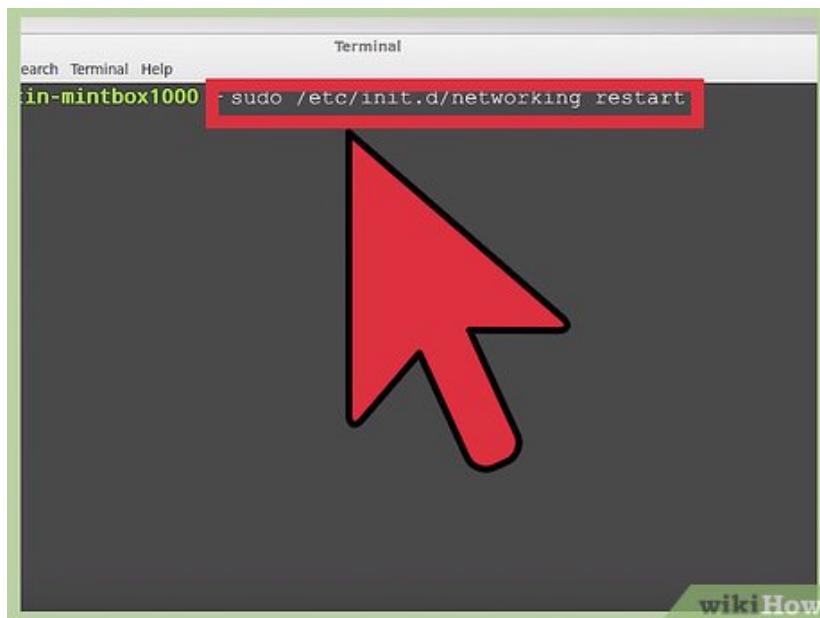

Restart your network. Restart your network by typing `sudo /etc/init.d/networking restart`.^[1]

You finished reading the article "**How to Add or Change the Default Gateway in Linux**" edited by the [TipsMake](#) team. We hope this article has provided you with many useful tech tips and tricks. You can search for similar articles on tips and guides. Thank you for reading and for following us regularly.