



How to Add or Change the Default Port on Linux

The default gateway is the router's IP address. Normally, the connection port will be automatically discovered by the operating system during the installation process, but you may need to change it, especially in cases where the computer has many adapters or routers on the network. .


Use Terminal

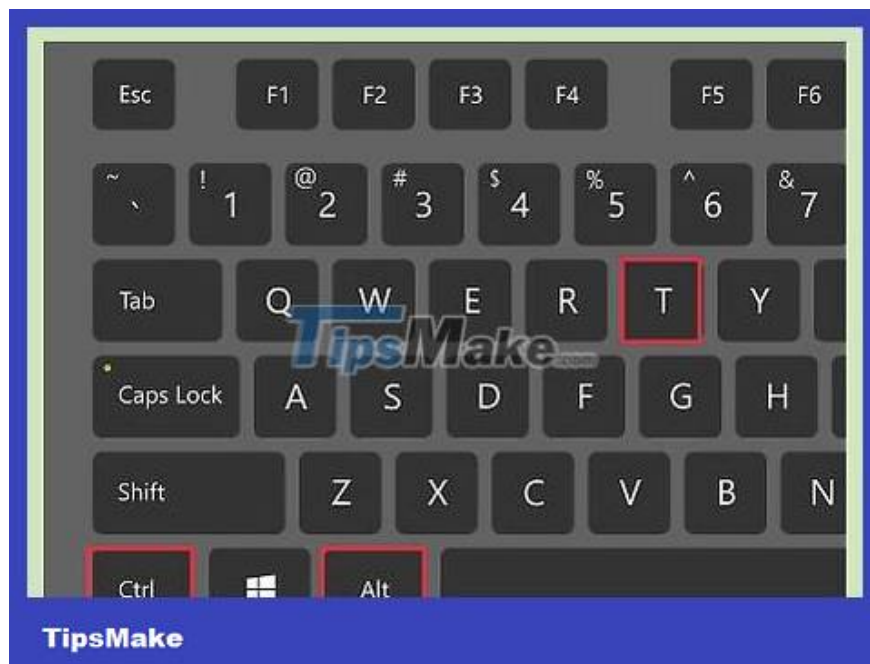

Open the Terminal application. You can open Terminal from the sidebar, or press `Ctrl+Alt+T`.

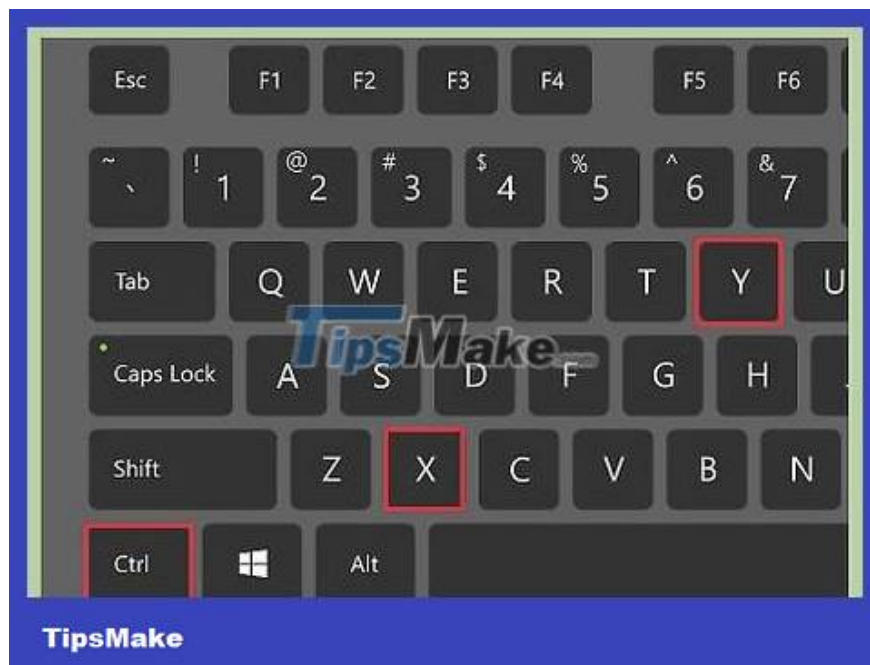

Save your changes and exit. Press `Ctrl+X` then press key `Y` to save changes and exit.

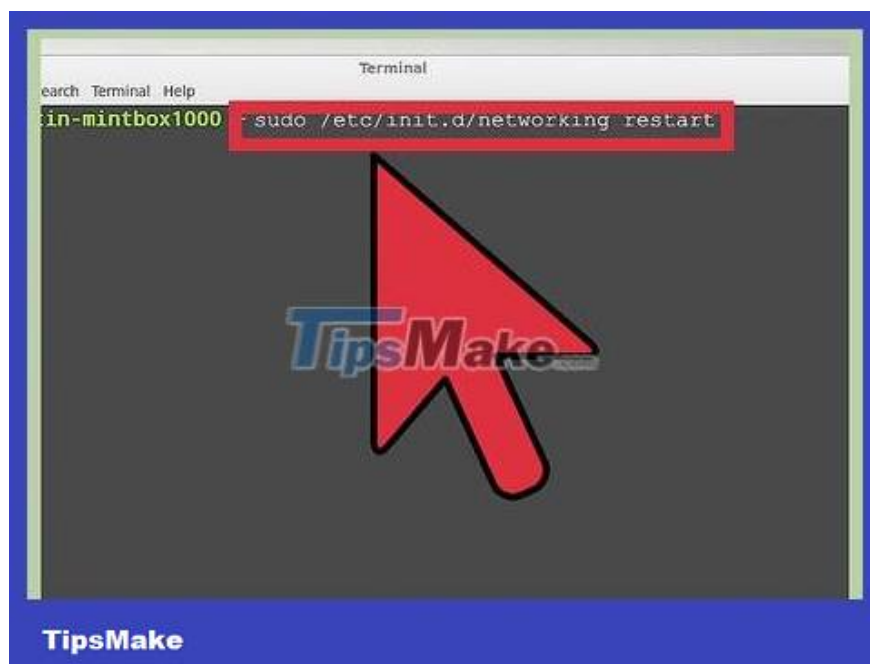

Restart the network. Restart your network by typing the command `sudo /etc/init.d/networking restart`.

You finished reading the article "**How to Add or Change the Default Port on Linux**" edited by the [TipsMake](#) team. We hope this article has provided you with many useful tech tips and tricks. You can search for similar articles on tips and guides. Thank you for reading and for following us regularly.