

# The getchar () function in C

The function `int getchar (void)` in Library C takes a character (an unsigned char) from stdin. This function is equivalent to the `getc` function with the parameter `stdin`.

The function **`int getchar (void)`** in Library C takes a character (an unsigned char) from stdin. This function is equivalent to the `getc` function with the parameter `stdin`.

## Declare getchar () in C

Here is the declaration for `getchar ()` function in C:

```
int  getchar ( void )
```


1. **Parameters:** This function does not receive any parameters.
2. **Return value:** This function returns the character read as an unsigned char that is cast to an int or EOF or error.

### For example

The following program C illustrates the usage of `getchar ()` function in C:

```
#include <stdio.h>
int  main  () { char  c ; printf ( "Nhap ky tu: " ); c = getchar (
```

Compiling and running the above C program will result:

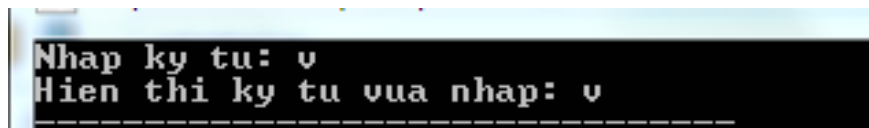

```
Nhap ky tu: v
Hien thi ky tu vua nhap: v
```

According to Tutorialspoint

Previous article: Function `getc ()` in C

Next lesson: Ham `putc ()` in C

You finished reading the article "**The `getchar ()` function in C**" edited by the [TipsMake](#) team. We hope this article has provided you with many useful tech tips and tricks. You can search for similar articles on tips and guides. Thank you for reading and for following us regularly.